


Four Pole Distribution Blocks

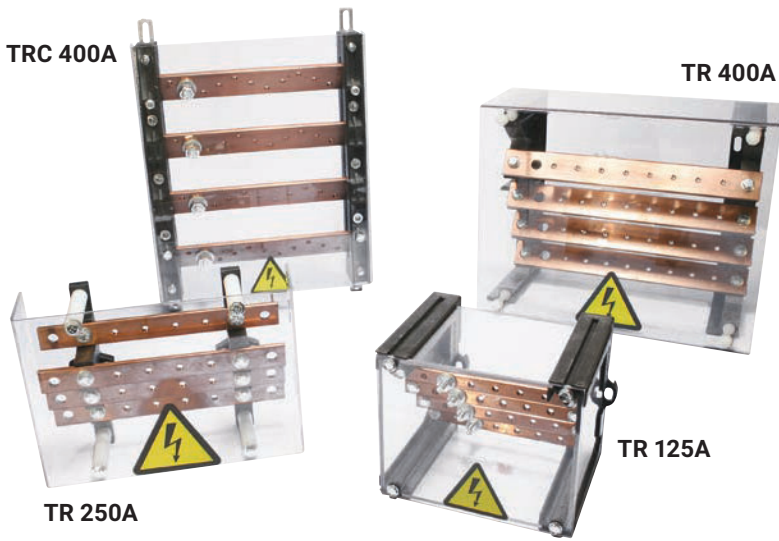


- A complete range from 125 A to 630 A
- Transparent protection cover
- Large accessibility for wiring
- Pre-assembled
- Self Extinguishing: UL94 V-0
- RoHS Compliant
- IEC 61439.1

TR 125A

Threaded bars
12 x 4 – I = 125 A

- Easy clip in fixing for DIN rail or sheet steel
- Protection screen on 5 sides
- Equipped with a current input plug M6
- 5 outlets M5 per phase




- Icw kA rms 1s: 8.4
- Ipk kA: 40
- Ui = 1000V

TR 250A

Threaded bars
20 x 5 – I = 250 A

- Easy fixing for DIN rail G or sheet steel
- Incomers right or left Ø 8 mm
- 4 outlets M6 per phase




- Icw kA rms 1s: 17
- Ipk kA: 34
- Ui = 630V

TRC 400A

Threaded bars
32 x 5 in W – I = 400 A

- Easy connections due to inclined bars
- Equipped with a current input plug M10
- 10 outlets M6 per phase



- Icw kA rms 1s: 28
- Ipk kA: 118
- Ui = 1000V

Art. Nr.	Description		
563150	TR 125A	1	0.684


Art. Nr.	Description		
563170	TR 250A	1	1.30

Art. Nr.	Description		
563180	TRC 400A	1	2.65

TRS 160A

Threaded bars
15 x 5 – I = 160 A

- Easy fixing for DIN rail G or sheet steel
- Incomers right or left Ø 8 mm
- 6 outlets M6 per phase




- Icw kA rms 1s: 13.2
- Ipk kA: 34
- Ui = 630V

TR 400A

Threaded bars
32 x 5 – I = 400 A

- Easy fixing for DIN rail or sheet steel
- 1 incomer Ø 10 mm
- 8 outlets M6 per phase




- Icw kA rms 1s: 28
- Ipk kA: 34
- Ui = 1000V

TRC 630A

Threaded bars
30 x 10 – I = 630 A

- Incomers Ø 10 mm
- 8 outlets M8 per phase



- Icw kA rms 1s: 52
- Ipk kA: 84
- Ui = 1000V

Art. Nr.	Description		
563160	TRS 160A	1	1.15

Art. Nr.	Description		
562010	TR 400A	1	2.83

Art. Nr.	Description		
563190	TRC 630A	1	4.80